
## **ISO744**



## **45A Cooker Control Unit**



| TECHNICAL SPECIFICATION       |   |
|-------------------------------|---|
| Standard(s)                   | BS 1363-2, BS 4177  |
| Voltage Rating                | 45 Amp, 250V~   |
| Switch Type                   | Double Pole   |
| Mounting Box Depth (Min)      | 35mm  |
| Terminal Capacity             | 3 x 2.5mm², 3 x 4.0mm², 2 x 6.0mm²  |
| Fixing Centres                | 120.6mm   |
| Size                          | 146mm x 86mm x 7mm (Plate thickness)  |
| Product Class 1               | This product must be earthed  |
| Ambient Operating Temperature | -5° to +40°C  |
| Recommended Location          | Internal Use Only   |
| Maximum Installation Altitude | 2000m   |
| IP Rating                     | IP2XD   |
| Mains Frequency               | 50hz - 60hz   |
| Trademarks                    | The Lieber Company is a registered trade mark number: UK00003313578 Date: 26 May 2018 |

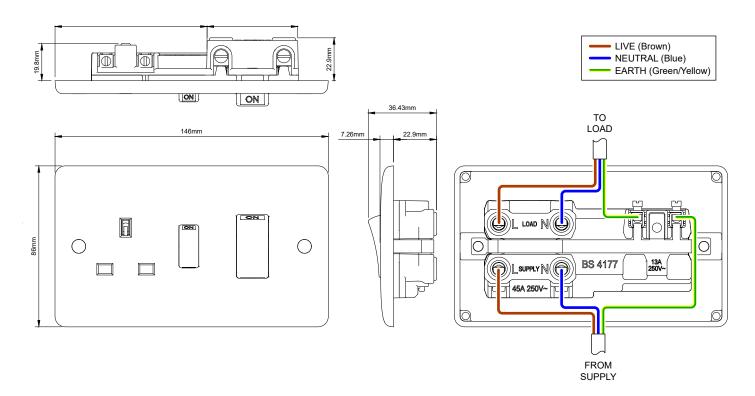