
LTS731



10A 1 Gang Intermediate Switch

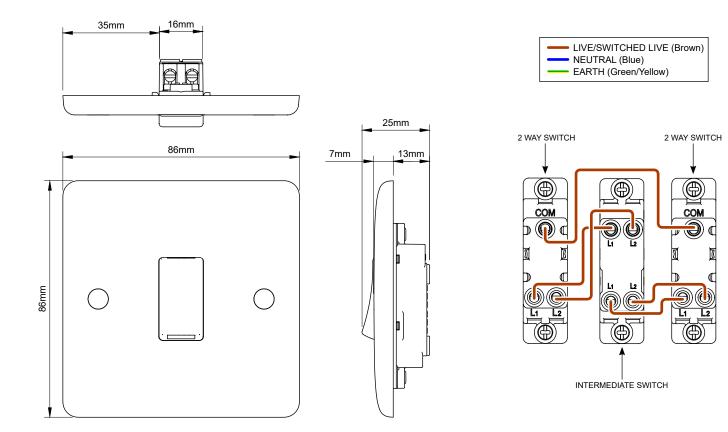

| TECHNICAL SPECIFICATION | |
|-------------------------------|--|
| Standard(s) | BS EN 60669-1 |
| Voltage Rating | 10 A(X), 250V~ |
| Switch Type | Single Pole |
| Mounting Box Depth (Min) | 25mm |
| Terminal Capacity | 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm², 1 x 4.0mm² |
| Size | 86mm x 86mm x 7mm (Plate thickness) |
| Fixing Centres | 60.3mm |
| Product Class 1 | Face plate does not need to be earthed |
| Ambient Operating Temperature | -5° to +40°C |
| Recommended Location | Internal Use Only |
| Maximum Installation Altitude | 2000m |
| IP Rating | IP2XD |
| Mains Frequency | 50hz - 60hz |
| Trademarks | The Lieber Company is a registered trade mark number: UK00003313578 Date: 26 May 2018 |

All products listed conform to current British or European standard and the product information is correct at the time of going to press.

Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.



The Lieber Lighting Company. Registered in England Number: 10797314. Copyright © 2018 All Rights Reserved.