
## **LTS732**



## 10A 2 Gang Intermediate Switch

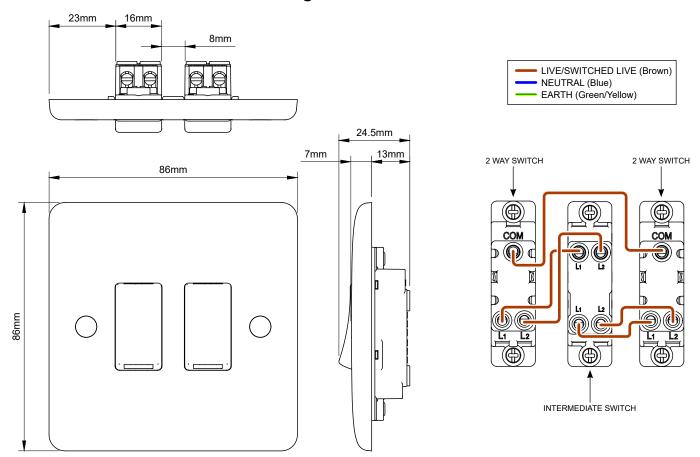

TECHNICAL SPECIFICATION	
Standard(s)	BS EN 60669-1
Voltage Rating	10 A(X), 250V~
Switch Type	Single Pole
Mounting Box Depth (Min)	25mm
Terminal Capacity	4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm², 1 x 4.0mm²
Size	86mm x 86mm x 7mm (Plate thickness)
Fixing Centres	60.3mm
Product Class 1	Face plate does not need to be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
IP Rating	IP2XD
Mains Frequency	50hz - 60hz
Trademarks	The Lieber Company is a registered trade mark number: UK00003313578 Date: 26 May 2018

All products listed conform to current British or European standard and the product information is correct at the time of going to press.

Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.

